



LED colour(LED颜色)	Part No. 料号
Whiter(白色)	K6-6157S-01
Red(红色)	K6-6157S-02
Blue(蓝色)	K6-6157S-03
Green(绿色)	K6-6157S-04
Yellow/Green(黄/绿色)	K6-6157S-05
Red/Blue(红/蓝色)	K6-6157S-06
Red/Green(红/绿色)	K6-6157S-07



Circuit Diagram

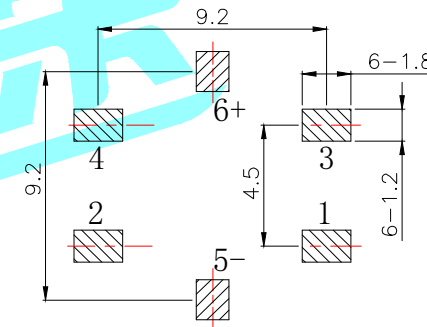

PCBLayout(Top view)

### Typical Specifications

- 1.Rating : DC 12V 10mA
- 2.Insulation Resistance : 100mΩ Min
- 3.Dielectric Strength :AC 250V for 1 minute
- 4.Operating Force : 260±50 gf
- 5.Contact Resistance : 50mΩ MAX
- 6.Life : 80,000 Cycles Min
- 7.Waterproof : IP67

⑧	Waterproof membrane	—	1	—	Black	—
⑦	Waterproof pad	—	1	—	Black	—
⑥	Contact	—	1	SUS	—	—
⑤	Cover	—	1	PPA	Black	—
④	LED	—	1	GaASP/GaP	—	—
③	Terminal	—	6	Brass	Ag Plating	—
②	Base	—	1	PPA	Black	—
①	Button	—	1	PPA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE		 ELECTRONICS CO.,LTD			
DRAWN	LIUCAN	2021.09.06					TITLE:
CHECKED				PART NO.	K6-6157S-□□		
APPROVALS				TOLERANCES ARE			
		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10	±2'	DRAWING NO.		
				PROJ:			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—