





ROHS

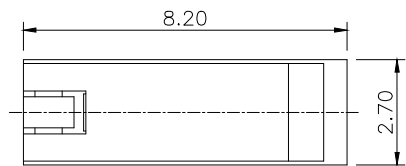

Circuit Diagram

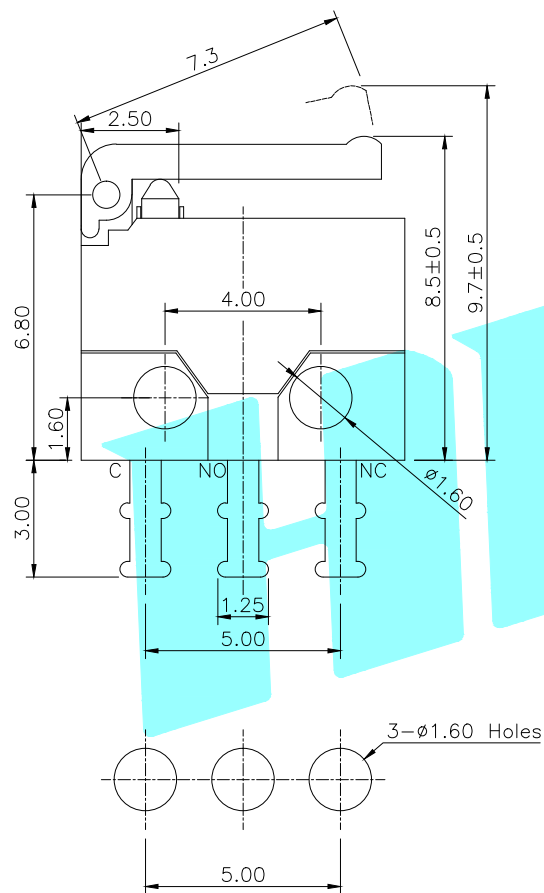


PCB Layout(Pattern side)

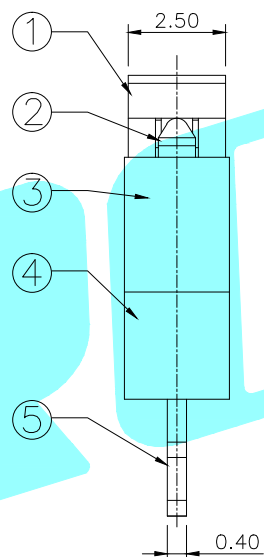


NOTE:
 Rating: DC 30V 50mA
 Operating Force: 30±15gf
 Lifetime: 200,000 Cycles

PART NO.

K9-8227L




K9-8227R



K9-8227D



K9-8227F

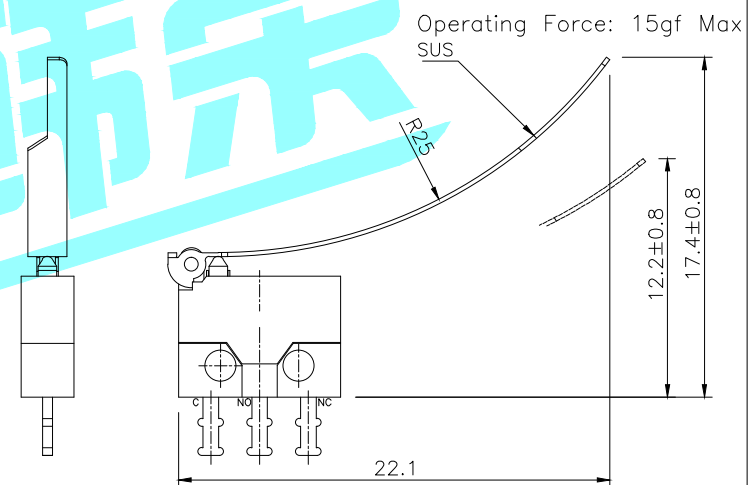

⑦	Touch Point	—	1	Silver Alloy	Natural	—
⑥	Spring Plate	—	1	Phosphorous Bronze	Natural	—
⑤	Terminal	—	3	Brass	Ag Plated	—
④	Housing	—	1	PA46	Black	—
③	Cover	—	1	PBT	Black	—
②	Knob	—	1	PA46	Black	—
①	Lever	—	1	PA46	Black	—

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
------	-----------	---------	------	----------	-----------	--------

APPROVALS			DATE	 ELECTRONICS CO.,LTD		
DRAWN	J.X.Zhang	2019/8/1				

CHECKED			TITLE:	MICRO SWITCHES
APPROVALS			PART NO.	K9-8227□

TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	±0.20				
	5~10	±0.15	±2'	DRAWING NO.		SHEET 1 OF 1
	~ 5	±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			