




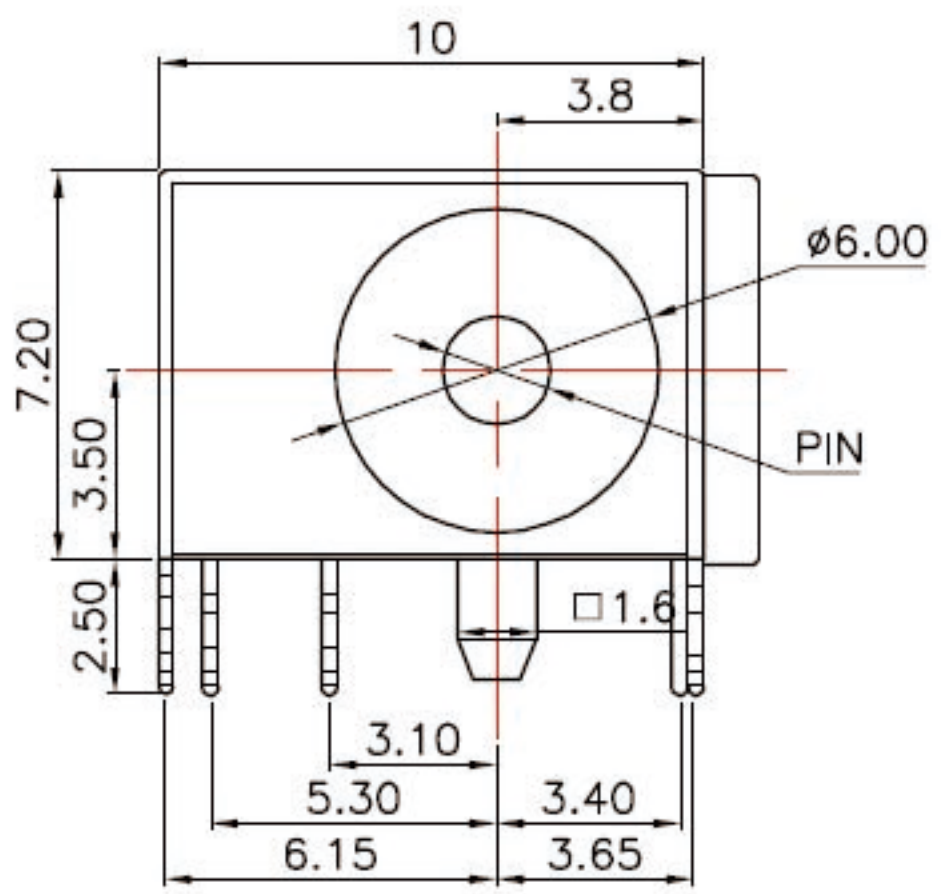

P.C.B LAYOUT(copper-sided view)

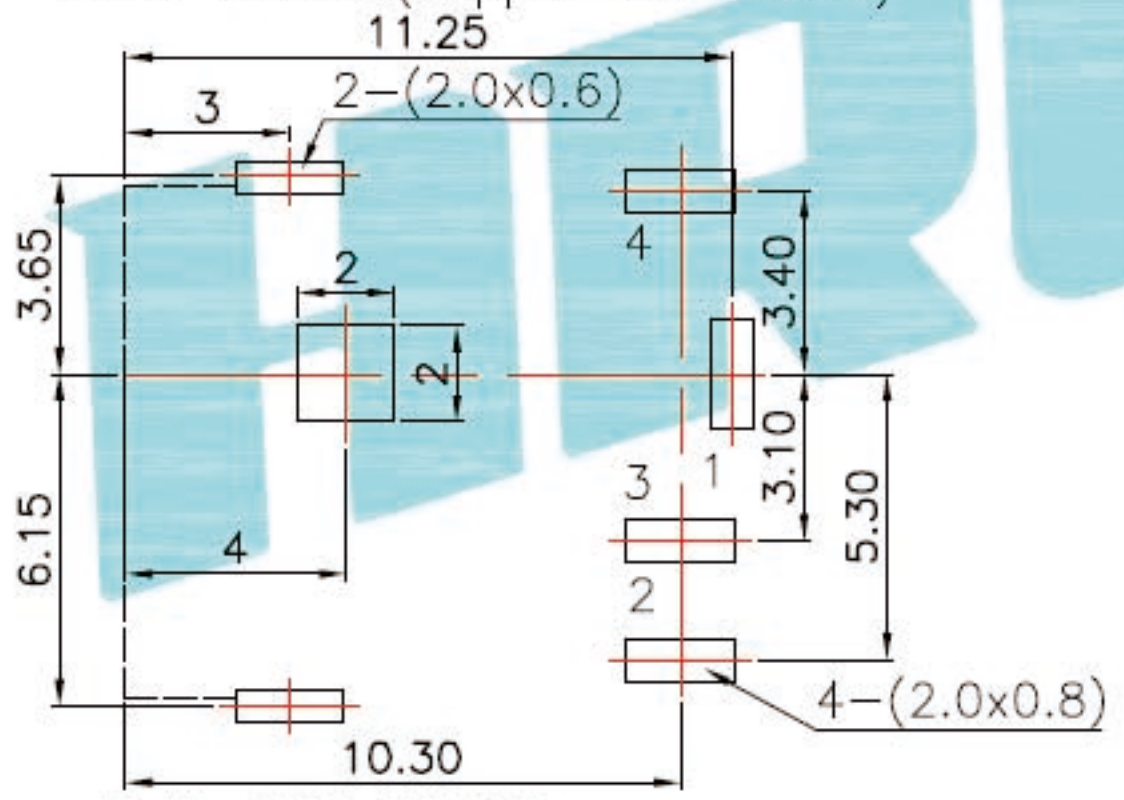


Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

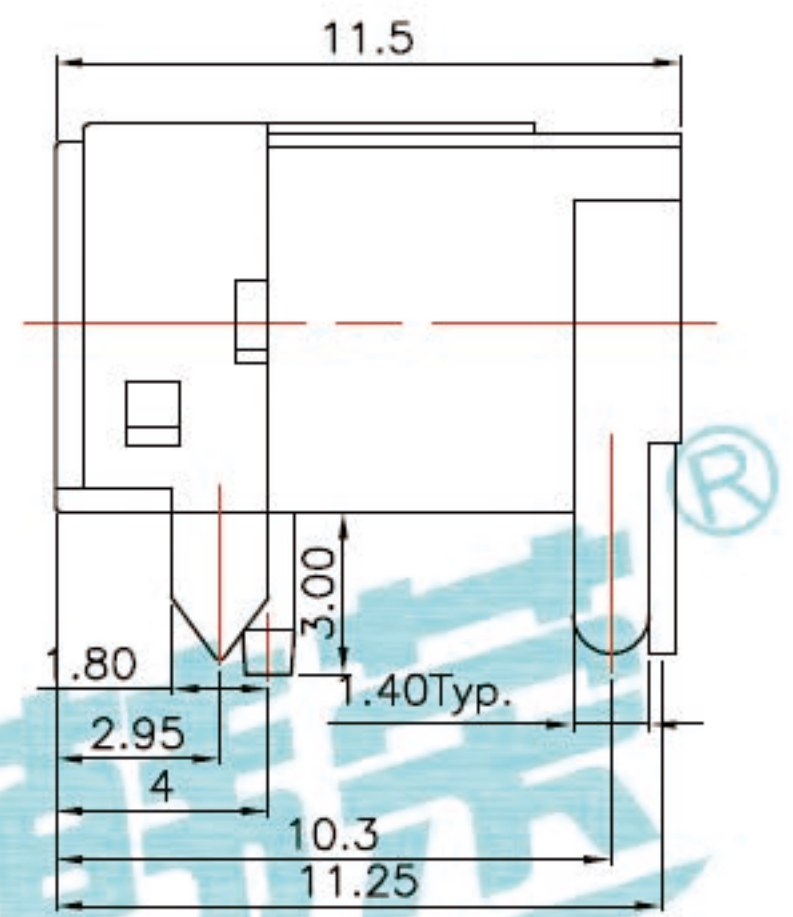

Model No.	DC-044C-A	DC-044C-B
Schematic		
Model No.	DC-044C-C	DC-044C-D
Schematic		

Model No.	1	2	3
PIN	φ1.65	φ2.0	φ2.5

②	Terminal	——	4	Phosphor bronze	Au Plating	——		
①	Housing	——	1	Nylon	Black	——		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK		
APPROVALS			DATE	 ELECTRONICS CO.,LTD				
DRAWN	J.X.Zhang	2013/11/11						
CHECKED			TITLE:				PHONE JACKES	
APPROVALS			PART NO.				DC-044C	
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ. 	
		10~30	±0.20					
		5~10	±0.15					
		~ 5	±0.10					
		±2'		DRAWING NO.	——	SHEET 1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			