


Rating: 0.5A 30V DC
 Contact Resistance: 100 mΩ Max.
 Operating temperature: -20℃ ~ 70℃
 Operating force: 3-20N
 Operating Life: 5,000 cycles

Model No.	1	2	3
PIN	∅2.0	∅2.35	∅2.5

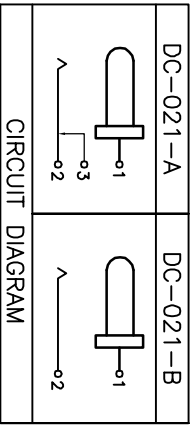

② Terminal	3	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM PART NAME	TERN.O.	QTY.	MATERIAL FINISHING
APPROVALS		DATE	REMARK
DRAWN	J.X.Zhang	2013/11/11	
CHECKED			
APPROVALS			
TOLERANCES ARE		30 ^{±0.15}	±0.30
	10 ^{±0.20}	5 ^{±0.10}	±0.20
	~5	±0.10	±0.15
TITLE:		PHONE JACKS	
PART NO.		DC-021	
SCALE:		1:1	
DRAWING NO.		PROJ. SHEET 1 OF 1	

OKHRO
 ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			