

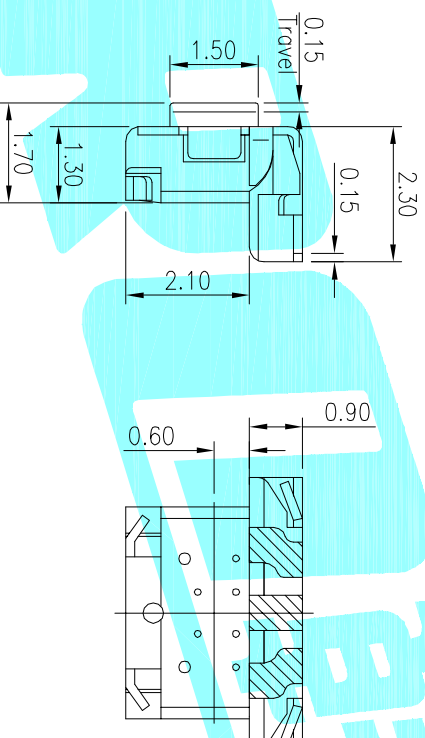


Circuit diagram

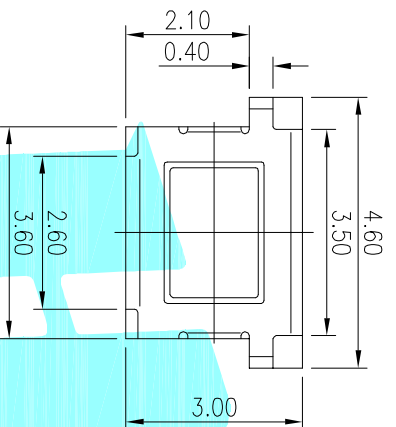

- Notes:
1. Rating: 12V DC 50mA
 2. Contact resistance: 100mΩ max
 3. Insulation resistance: 100MΩ 250V AC for 1min
 4. Dielectric strength: 250V AC(50/60hz) for 1min
 5. Life test: 100,000 Cycles
 6. Travel: 0.15±0.05mm

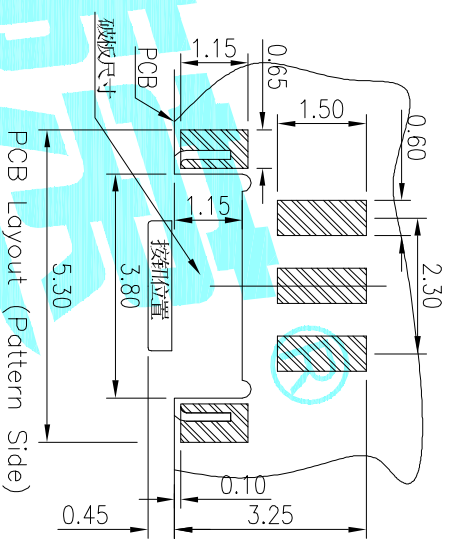

NO.1		NO.2	
PART NO	MATERIAL/QTY	PART NO	MATERIAL/QTY
1	vigor 90±30	S	SUS/1PC
2	130±30	D	SUS/2PCS
3	180±30		
4	250±30		
5	350±50		

NO.3-NO.4	
PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	3	Phosphor Bronze	Plating silver	—
④	Contact	—	1	SUS	Plating silver	—
③	Base	—	1	Nylon	Black	—
②	Cover	—	1	SUS	Natural	—
①	Keystroke	—	1	Nylon	Black	—

APPROVALS		DATE	TITLE:	
DRAWN	JKUN.LU	2016/6/30	Tact Switch	
CHECKED			ELECTRONICS CO.,LTD	
APPROVALS				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROJ:	SHEET
	A		NEW				30~12.5 ±0.30	±2°	mm	1:1	OK	1 OF 1
							10~30 ±0.20					
							5~10 ±0.15					
							~5 ±0.10					