


PCB Layout (Pattern side)

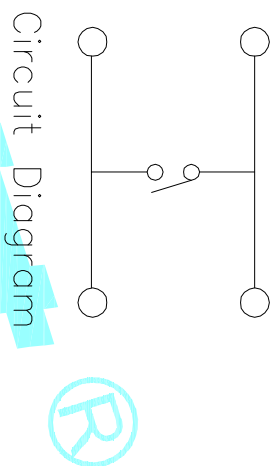

Circuit Diagram

Typical Specifications :
 1. Rating : DC 12V 50mA
 2. Life: 100,000 Cycles Min.

NO.2	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

NO.3	
PART NO	MATERIAL/QTY
S	SUS/1PC
C	C5210/1PC
D	SUS/2PCS
F	C5210/2PCS

NO.4-NO.5	
PART NO	NOTE
01~99	SERIAL NUMBER

⑤	Terminal	—	4	Brass(0.3t)	Plating silver	—
④	Contact	—	1	F.Ag/C5210	—	—
③	Base	—	1	Nylon	Black	UL94V-0
②	Cover	—	1	SPCC	Plating Sn	—
①	Keystroke	—	1	Nylon	Black	UL94V-0
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		ELECTRONICS CO.,LTD		
DRAWN		xu qi feng		2014.11.26		
CHECKED				TACT SWITCHS		
APPROVALS				PART NO. K2-1103ST-AD00W-00		
TOLERANCES ARE		30~12.5	±0.30	ANGLE	SCALE: 1:1	
		10~30	±0.20		PROJ:	
		5~10	±0.15	±2'	SHEET 1 OF 1	
		~5	±0.10			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			