


P.C.B LAYOUT(copper-sided view)  
3-(0.6x2.5)

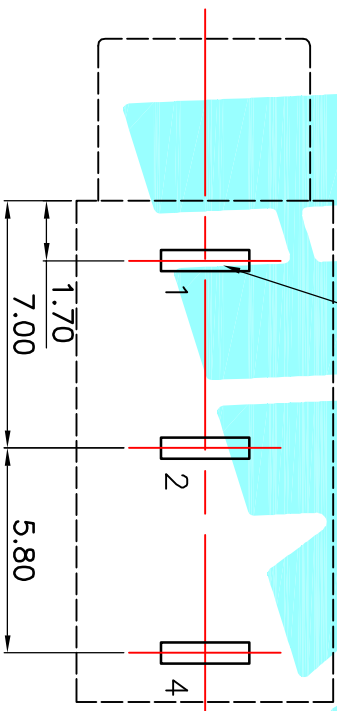

Model No.	A=φ6 A=M6xP0.5	PJ-3230-A PJ-3230A-A
Schematic		

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
DRAWN J.X.Zhang 2013/11/11 CHECKED APPROVALS TOLERANCES ARE 30 <sup>±0.15</sup> 10 <sup>±0.20</sup> 5 <sup>±0.15</sup> ~ 5 ±Z TITLE: PHONE JACKS PART NO. PJ-3230 SCALE: 1:1 SHEET 1 OF 1						
ELECTRONICS CO.,LTD						