


P.C.B LAYOUT(copper-sided view)

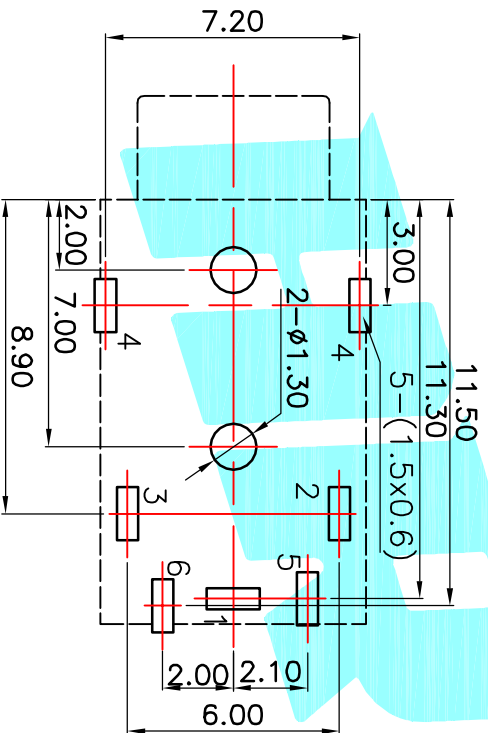

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

Model No.	PJ-3910-A	PJ-3910-B	PJ-3910-C
Schematic			
	PJ-3910-D	PJ-3910-E	

② Terminal	6	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11		TITLE: PHONE JACKES		
CHECKED				PART NO. PJ-3910		
APPROVALS				SCALE: 1:1		
TOLERANCES ARE				DRAWING NO.		
	30 ^{±0.15}	±0.30	ANGLE	PROJ.		
	10 ^{±0.20}	±0.20	UNIT: mm	SHEET 1 OF 1		
	5 ^{±0.10}	±0.15	±Z'			
	~ 5	±0.10				
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

