



P.C.B LAYOUT(copper-sided view)
10.30
3--(2.0x0.8)

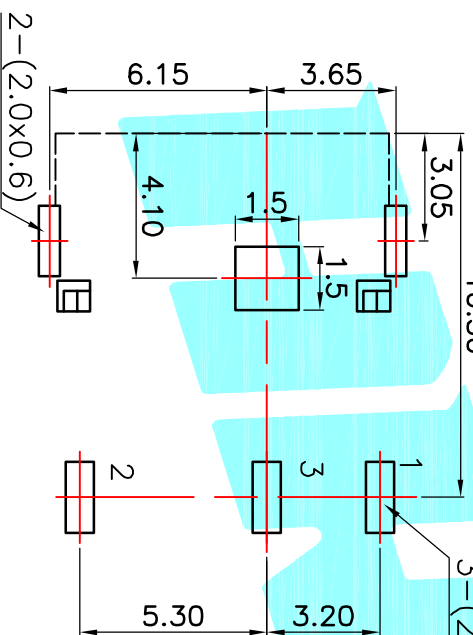

Model No.	A=1.4,H=3	DC-004A-A	DC-004A-B
	A=φ1.5,H=3	DC-004F-A	DC-004F-B
	A=1.6,H=3	DC-004G-A	DC-004G-B
	A=1.4,H=1	DC-004H-A	DC-004H-H

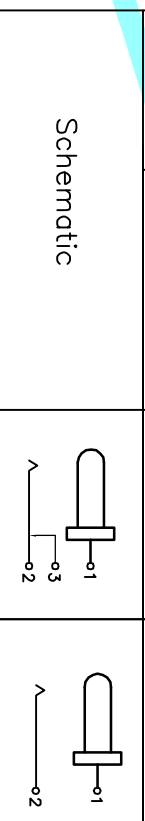

Model No.	1	2	3
PIN	φ1.65	φ2.0	φ2.5

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Life:5,000cycles

ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
②	Terminal	—	3	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—

APPROVALS

DRAWN	DATE	TITLE:
J.X.Zhang	2013/11/11	PHONE JACKES

ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

TOLERANCES ARE

30±0.1	±0.30	ANGLE	PART NO.	SCALE: 1:1	PROJ.
10~30	±0.20		DC-044A		
5~10	±0.15	±2'			
~5	±0.10				

SHEET 1 OF 1