



NOTE:
 Operating Force:
 lever portion 70 ± 40 gf
 Push portion 200 ± 40 gf
 Travel: -25° 0° $+25^\circ$ Pushportion 0.9 ± 0.1 mm

P.C.B Mounting
 Pattern Dimension

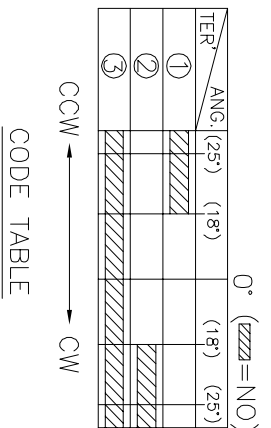

CODE TABLE



ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Contact	—	1	F.Ag/Bross	Plating silver	—
⑤	Terminal	—	5	Brass(0.15t)	Plating silver	—
④	Base	—	1	LCP	Black	—
③	Spring	—	1	SUS	Natural	—
②	Cover	—	1	SUS	Natural	—
①	Keystoke	—	1	PA46	Black	—

APPROVALS	DATE	TITLE
DRAWN J.X.Zhang	2013/8/8	MULTIFUNCTIONAL SWITCHS
CHECKED		
APPROVALS		

OKHRO
 ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROJ:	SHEET
	A		NEW				30~12.5 ±0.30	±2°	mm	1:1	PROJ: 1502SA-01	1 OF 1
							10~30 ±0.20					
							5~10 ±0.15					
							~5 ±0.10					